
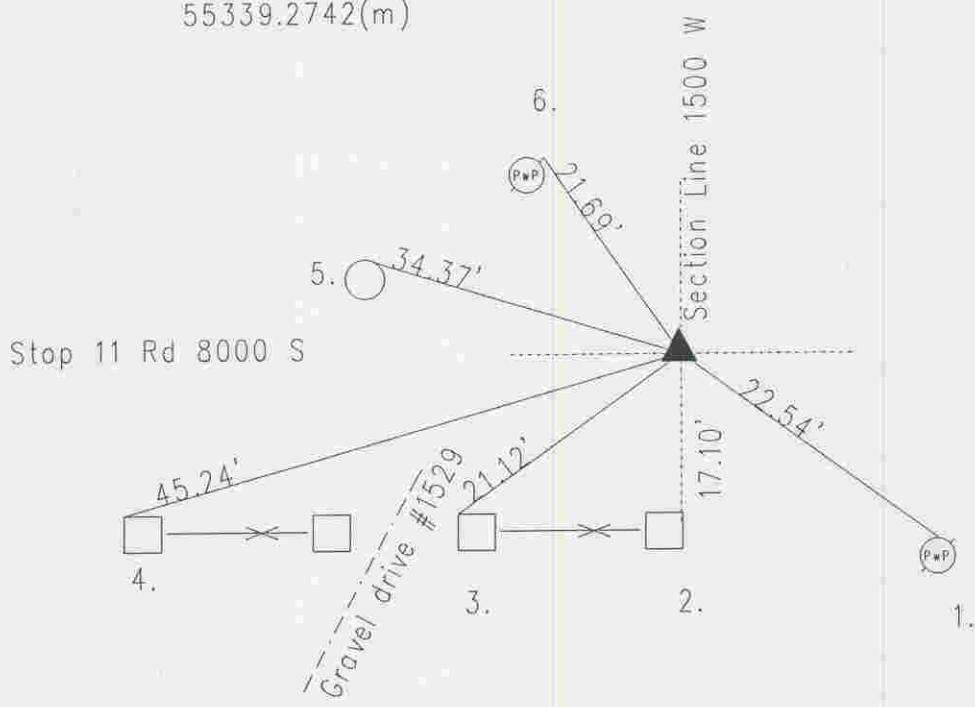


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 14 RANGE 3
DATE: 8-29-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison no cap
METHOD OF ESTABLISHMENT: County: 10-27-99

IN. S.P.C. E ZONE NAD '83
NAME: 14032202
N: 488695.3021(m)
E: 55339.2742(m)

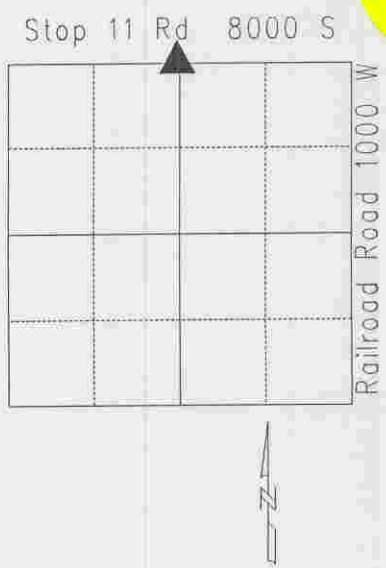

Original post set 1820 by Wm. B. Laughlin with witness: 12" beech S 61 W 23 links; 14" walnut N 57 W 22 links per Marion County Atlas pg. 5. No note of type of monument set or recovered or witness. Monroe, unknown date, and marker. McLond 5-8-70 called a stone 12" down. Miller 6-26-75 called railroad spike at surface over stone 12" down. Greene 6-26-86 called railroad spike over stone 12" down. Excavated by Wilcoxon 10-6-92 and found PK nail at surface. Found railroad spike 3" down under nail. Stone found under spike 16" down. Set Harrison. Re-tied 10-27-99 by Kiste. Re-tied 8-29-05 by Wilcoxon.

14032202

REF.	DISTANCE	DESCRIPTION
1.	22.54'	PK nail N PwP#1-783B 12"up
2.	17.10'	Mag nail w/MCSO washer F wooden corner fence post 3" up
3.	21.12'	PK nail NW wooden fence post 10" up
4.	45.24'	Mag nail NW wooden fence post 10"up
5.	34.37'	Mag nail w/MCSO washer NF mailbox post 12"up
6.	21.69'	Mag nail w/MCSO washer NF PwP#38-782A 12"up